


WOKISOL

Hebei Woqin Advanced Materials



☎ Phone: +86 13933929092
✉ Email: an@cn-aerogel.com
🌐 Website: www.cn-aerogel.com
🔗 LinkedIn: www.linkedin.com/in/ruibin-an-aerogel
📍 Address: 10th Floor, Building C, Rongsheng Center, Chang'an District, Shijiazhuang City, Hebei Province, China

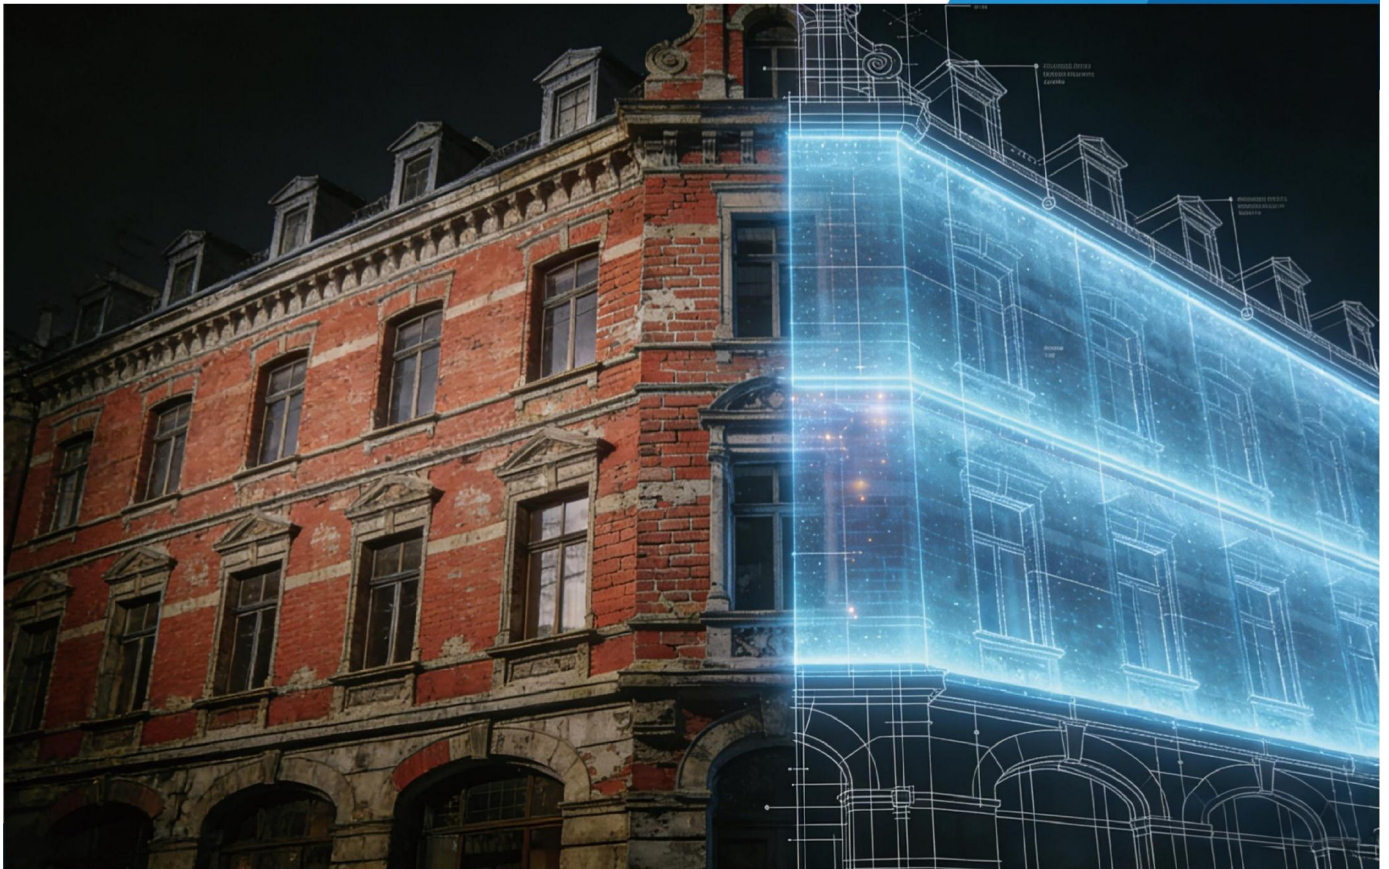


Innovating the Future of Ultra-Thin Thermal Envelopes.

Plasterboard-Aerogel Panel

The Ultimate Space-Saving IWI Solution

GYPSUM-ALUMINUM-AEROGEL COMPOSITE PANEL (HIGH-PERFORMANCE IWI)

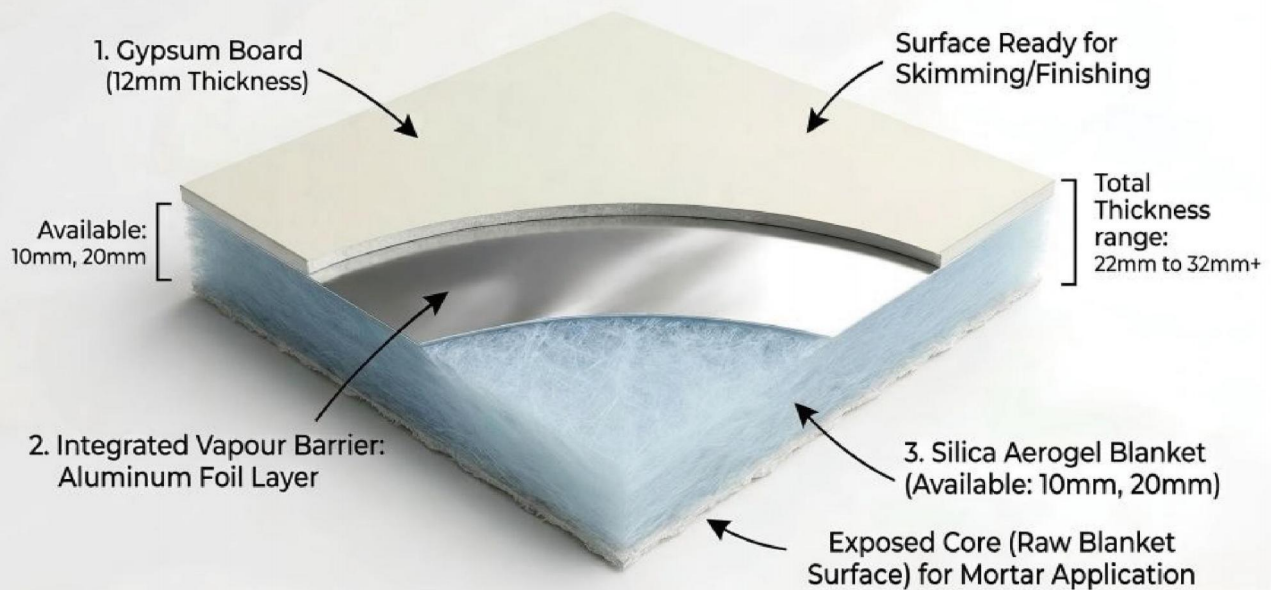

01

Applications & Problems Solved

Designed specifically for Internal Wall Insulation (IWI) in heritage buildings and tight residential spaces. Solves the "Space vs. U-Value" Dilemma: Delivers extreme thermal resistance without eating up valuable interior "carpet area".

02

Eliminates Condensation & Mold

The integrated Aluminum Foil acts as a Vapour Control Layer (VCL), preventing interstitial condensation in old masonry walls. Labor Saving: Ready for direct wall application and standard plaster skimming in one go.

03

Structure & Dimensions

Plasterboard Facing: 12mm standard thickness.
Aerogel Core Thickness: 3mm, 5mm, 10mm, 15mm, 20mm (10mm & 15mm are standard stock).
Vapor Barrier: Integrated Aluminum Foil VCL.
Technical Specs:
Core Thermal Conductivity: 0.016 W/(m·K) @ 0°C.
Standard Size: 2400mm x 1200mm.

MgO-Aerogel Panel

Heavy-Duty: MgO-Aerogel Composite Panel



Applications & Problems Solved:
Engineered for high-traffic environments (corridors, schools, public housing) and moisture-prone areas (basements, kitchens).



Solves Fragility Issues:
Traditional gypsum boards dent and break easily. Our MgO facing provides exceptional impact and flexural strength.



Solves Dampness & Rot:
Unlike paper-faced gypsum, MgO is 100% rot-proof and highly resistant to moisture degradation.



Ultimate Fire Safety:
Upgrades the entire wall system to a Class A1 Non-Combustible rating.

MGO-AEROGEL COMPOSITE INSULATION PANEL (ULTRATHIN HIGH-PERFORMANCE IWI)

1. High-Strength MgO Board
(5mm - 15mm Thickness)


5mm
15mm

2. Class A1
Non-combustible
Silica Aerogel
Blanket

Available:
→ 10mm
20mm

Total
Thickness
range:
15mm to
35mm+

3. Rough Backing for Adhesion:
Polymer-modified Mortar with
embedded Fiberglass Mesh

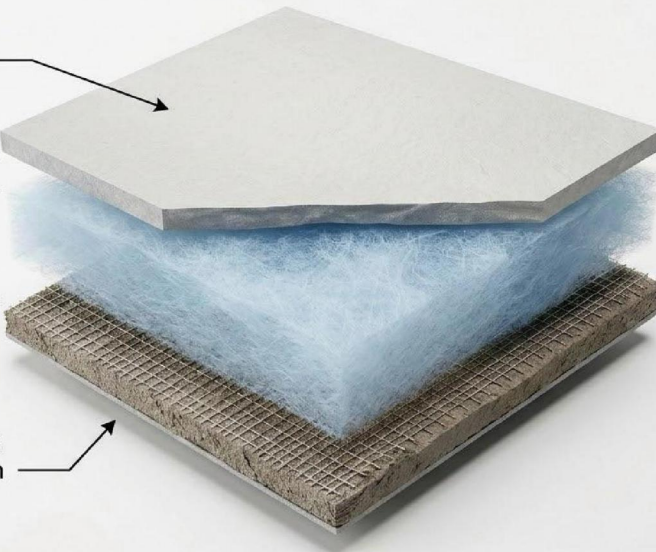

STRUCTURE & DIMENSIONS

MgO Board Facing: 5mm to 15mm thickness options. **Aerogel Core Thickness:** 5mm to 20mm (Customizable).

Vapor Barrier: Integrated Aluminum Foil VCL.

Technical Specs: Core Thermal Conductivity: 0.016 W/(m·K) @ 0°C.

Standard Size: 2400mm × 1200mm.

Flexible MCM-Aerogel Panel

Step Finish:

Eco-Friendly Flexible MCM-Aerogel Panel

Applications & Problems Solved

The ultimate rapid-retrofit solution. Combines extreme thermal insulation and a high-end decorative finish in a single step. Zero wet trades required.

Heritage Matching

We offer 90%+ texture similarity customization to match existing historical brick, stone, or wood finishes seamlessly.

Curved Surface Application


Highly flexible facing allows for easy installation on curved walls and complex architectural columns.

100% Eco-Friendly & Safe

The MCM (Modified Clay Material) finish is crafted from natural stone powder. Zero formaldehyde, zero VOCs, and completely non-toxic.



Banana-leaf Pattern

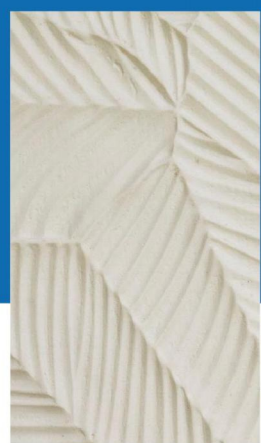

星月石① STARRY MOON STONE①
规格尺寸Size 600×300 1200×600mm

星月石② STARRY MOON STONE②
规格尺寸Size 600×300 1200×600mm

星月石③ STARRY MOON STONE③
规格尺寸Size 600×300 1200×600mm

星月石④ STARRY MOON STONE④
规格尺寸Size 600×300 1200×600mm

• 产品可按客户需求定制多种颜色与规格

The product can be customized in various colors and specifications according to customer requirements

Structure & Dimensions

MCM Facing: Natural stone/clay powder composite (Available in Slate, Rammed Earth, Wood Grain, etc.).

Aerogel Core Thickness: 5mm to 20mm.

Technical Specs :

Core Thermal Conductivity: 0.016 W/(m·K) @ 0°C.

Fire Rating: Class A.

Standard Size: 1200mm × 600mm / 600mm × 600mm.

Weight: Ultra-lightweight at approx. 6kg/m².

Aerogel Thermal Break Tapes Double-Sided Aluminum Foil Encapsulated

KEY VALUE PROPOSITION

The Ultimate Moisture-Proof & Thermal Break Solution. Specifically engineered for high-performance building envelopes. By encapsulating the aerogel core within double-sided high-purity aluminum foil, we deliver a 100% vapor-tight, high-strength insulation strip that eliminates thermal bridges in the most demanding environments.

Structure & Components

High-Tack Acrylic Adhesive:
Long-lasting bonding to metal and glass surfaces.

Double Aluminum Foil Layer:
100% vapor barrier and enhanced structural durability.

High-Purity Aerogel Core:
Ultra-low thermal conductivity core.

Standard Thicknesses:
Available in 3mm, 5mm, 10mm, 15mm, 20mm.

Technical Specifications

Core Material: Silica Aerogel

Encapsulation: Double-Sided Aluminum Foil

Thermal Conductivity: 0.018 - 0.022 W/(m·K)


Standard Thickness: 3mm / 5mm / 10mm / 15mm / 20mm

Standard Width: 25mm / 50mm / 100mm (Customizable)




PROBLEMS SOLVED

- 100% Vapor Control:**
The double aluminum foil creates a perfect seal, preventing moisture from penetrating the insulation layer.
- Eliminate Thermal Bridging:** Breaks the heat path between exterior cladding and interior structures without adding bulk.
- Anti-Corrosion (CUI Defense):** Protects metal studs and frames from condensation-induced corrosion.

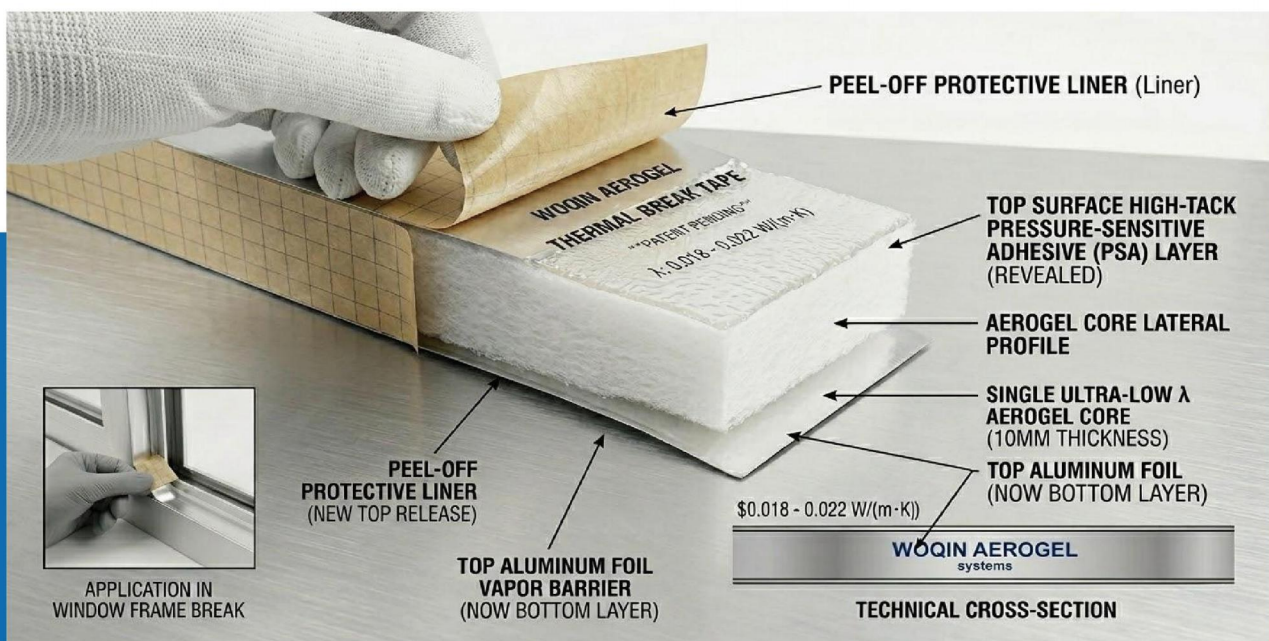


Vacu-Armor™ | Stainless steel Encapsulated VIP

The absolute physical limit of thermal resistance for Passivhaus and High-Rise Facades.

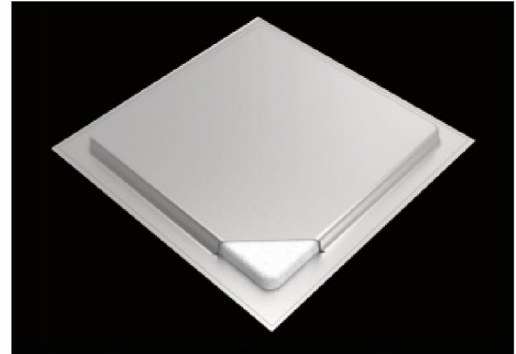

- **Ultimate Shield:** Encapsulated in 304 Stainless Steel (0.1mm) for maximum structural integrity and a ≥ 50 -year extreme service life.
- **Limit Performance:** Achieves an unmatched limit thermal conductivity of $0.002 \text{ W/(m}\cdot\text{K)}$.
- **Extreme Safety:** Delivers a Class A1 (Non-combustible) fire safety rating with 118 kPa compressive strength.
- **Applications:** Thermally broken balconies, high-rise building facades, and explosion-proof industrial cabins.

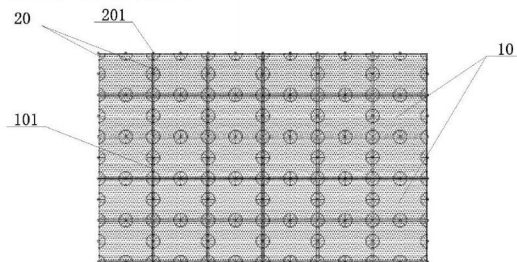

Item 10 / 101: Vacu-Series™ High-Barrier VIP Core Panel (Thermal conductivity: $0.002 \text{ W/(m}\cdot\text{K)}$)

Item 20 / 201: Woqin Aerogel Structural Gasket Tape (0-Gap Thermal Break, Thermal conductivity: $0.020 \text{ W/(m}\cdot\text{K)}$)

Micro-Channel: 3mm-5mm Breathable Cavity for Interstitial Condensation Prevention

The Core Business Value: "Space is Money"


By replacing 200mm of traditional mineral wool with just 20mm of Vacu-Armor™, architects can reclaim massive amounts of usable interior floor space. In premium real estate, this translates directly to millions in added property value.

Vacu-Core™ | Vacuum insulation Panel VIP

Guaranteed Lifespan: Encapsulated in High-Barrier Aluminum Foil with integrated getters for a guaranteed 15-year vacuum retention.

Limit Performance: Thermal conductivity of $0.002 \text{ W/(m}\cdot\text{K)}$ with a Class A (A2) fire rating.


Applications: The standard for Passivhaus exterior walls, commercial cold storage facilities, and refrigerated truck bodies.

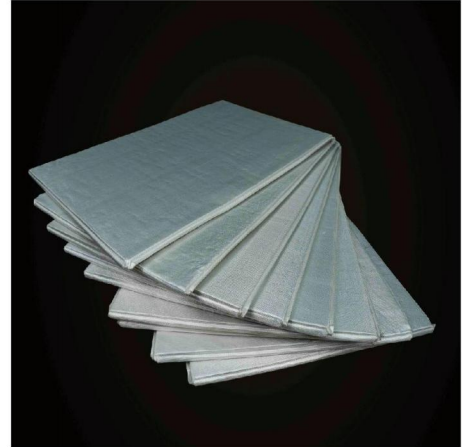**Proprietary Installation System:** Solving the Fatal Flaws of VIP

Permanently eliminating interstitial condensation and joint thermal bridging.


The Mold Killer: Breathable Micro-Channel Technology

By utilizing precisely engineered structural adhesive beads, we create a continuous 3mm to 5mm micro-cavity between the panel and the substrate wall. This acts as an active vapor venting system, allowing trapped moisture to escape and keeping the structural wall permanently dry.

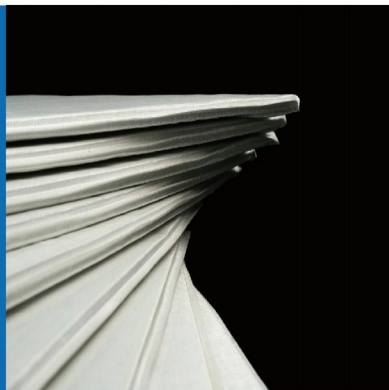

Vacu-Slim™ | 1-5mm Ultra-Thin VIP

Engineered for extreme space constraints
where every millimeter counts.

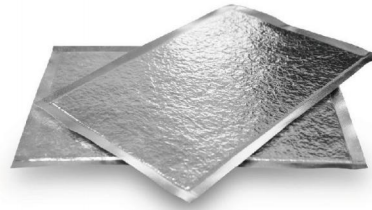**Hardcore Engineering Features:**

- **Ultra-Thin Profile:** Nominal thickness ranging from 1.0mm to 5.0mm.
- **Thermal Consistency:** Maintains an initial thermal conductivity of $\leq 0.003 \text{ W/(m}\cdot\text{K)}$.
- **Extreme Durability:** Capable of surviving 1000 hours in harsh "Double 85" (85°C/85% RH) testing conditions with zero thermal degradation.
- **Dielectric Strength:** Delivers extreme high-voltage insulation, successfully withstanding 3800V DC (Leakage < 1mA).

